POWER AMPLIFIER

58E

CAv2 series





BEWARE OF FAKES




COMPANY'S HOLOGRAM

POWER **V2**

WRITTEN NEAR POWER SWITCH

582

LOGO ENGRAVED ON SIDE PANEL

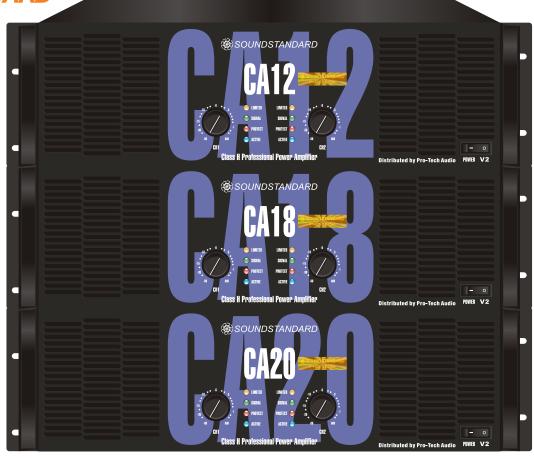

Model CA9V2 CA12V2 CA18V2 CA20V2

Output power (AC 220V / 50Hz. ±10%, All channels driven output power, THD=1%)

650Wx2	830Wx2	1100Wx2	1250Wx2
975W x2	1250W x2	1650W x2	1950W x2
1400W x2	1850W x2	2160W x2	2700W x2
1950W	2500W	3300W	3900W
2600W	3700W	4320W	5400W
	975W x2 1400W x2 1950W	975W x2 1250W x2 1400W x2 1850W x2 1950W 2500W	975W x2 1250W x2 1650W x2 1400W x2 1850W x2 2160W x2 1950W 2500W 3300W

Other specification

Frequency response 20Hz-20KHz(± 0.5 dB)

Damping factor $>500@8\Omega$

Input sensitivity 0.775Vms/1.0Vms/1.4Vms
Output circuitry 3 STEPS CLASS H

Protection Clip/limit, DC, short circuit, switch on/off zero impact, soft start, VHF

